



**Engineering progress
Enhancing lives**

SYNEGO window profiles


Technical sheet





SYNEGO window profiles

Ideal when constructing new buildings

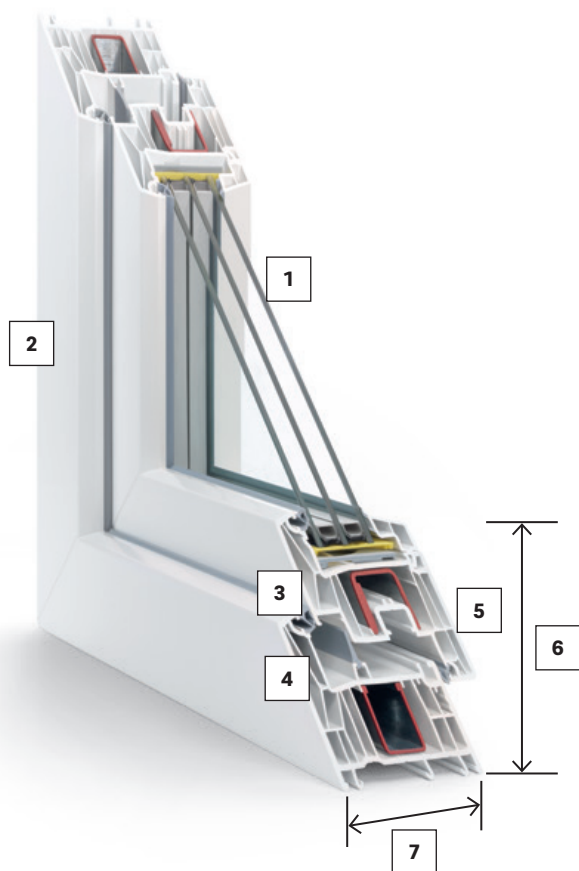

Technical data

Heat insulation	U_f value: up to 0,94 W/m ² K
Construction depth	80 mm
Burglary prevention	up to resistance class 3
Sound insulation	$R_{w,P}$ up to 47 dB
Multi-chamber profile	7/6 chambers
Sightline	up to 114 mm

- [1] Triple glazing to optimise the insulating properties**
Glass thickness of up to 51 mm
- [2] HDF frame surface**
The window will stay cleaner for longer
- [3] Seals for reliable protection**
Against draughts and moisture
- [4] Optional third seal level**
- [5] 7 chambers in the frame, 6 chambers in the casement**
For high insulation
- [6] Low vertical frame view (117 mm)**
For maximum daylight
- [7] Construction depth (80 mm)**
For lean proportions

© REHAU S.p.A